


VEHICTM CODE




LED HEADLIGHT BULBS

INSTALLATION GUIDE

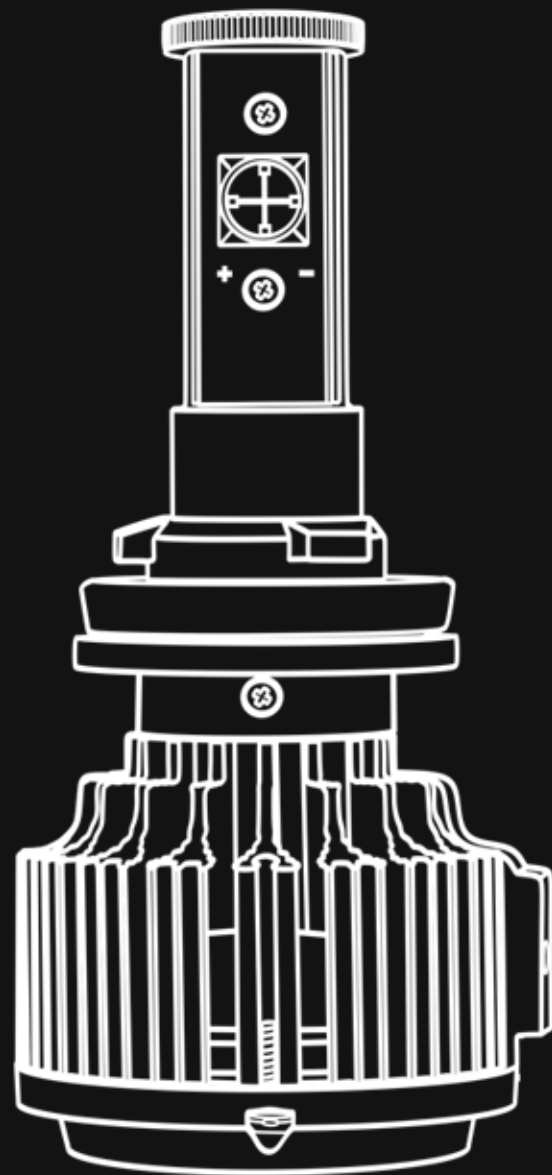

WARNING: by reading this document, I agree it is only to be used as an educational guide. VehiCode makes no guarantee on any finished results, nor are they to be held responsible for any damages, misuse, or personal injuries. Use at your own risk, if you are unable to clearly understand and adapt the information below to your own application, professional installation is recommended.

STANDARD PARTS

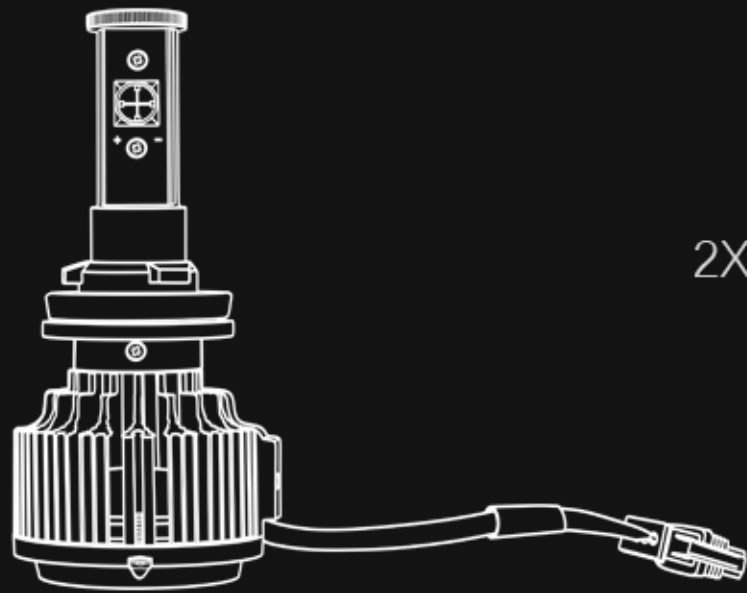


2X LED Headlight Bulbs



2X LED Ballasts

OPTIONAL PARTS

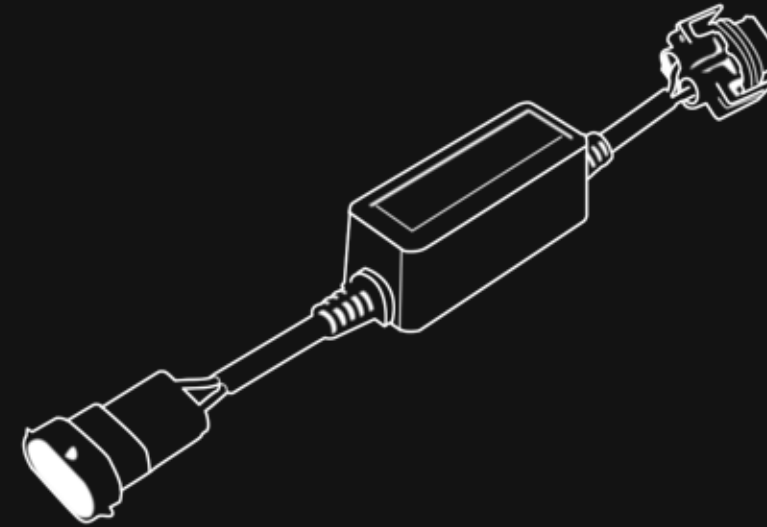


2X Capacitor Links




Some vehicle utilize a Pulse Width Modulator (PWM) that sends varying power through the factory wiring at a fast rate. The optional VehiCode Capacitors Links are designed for these systems. Using the VehiCode Ballast without these links on a PWM system will result in flickering lights and is not recommended for the longevity of the components.

STEP 1

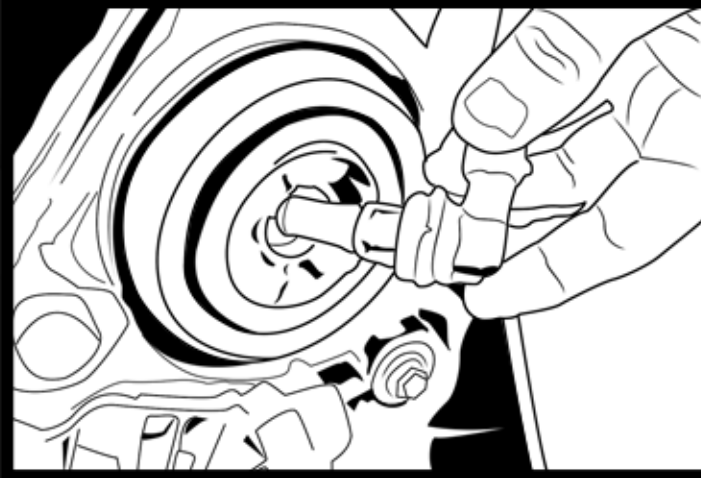


Open your vehicle's hood. Open the back cap of the headlight assembly and take out the stock bulb.

STEP 2

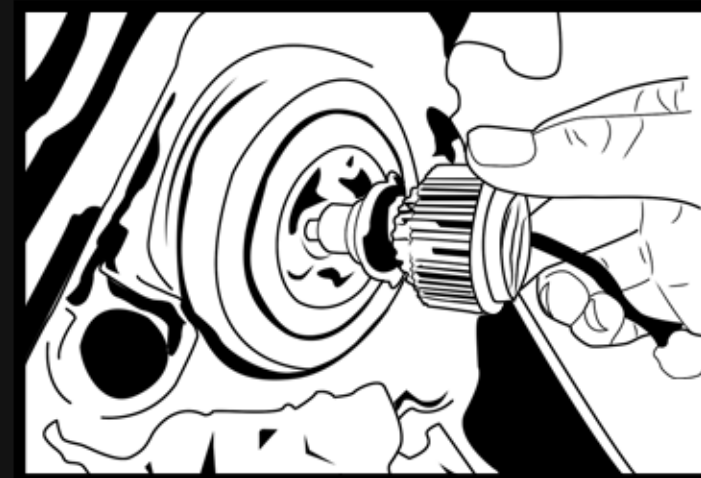

Insert the LED bulb into the headlight assembly.


STEP 3

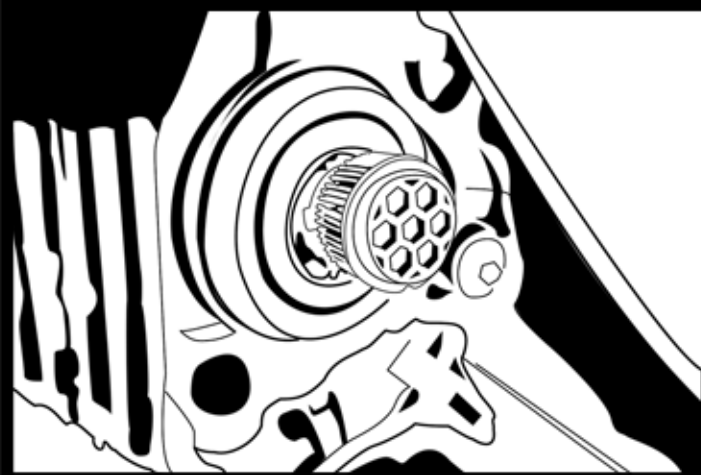

Fix VehiCode headlight bulbs into headlight assembly.



Insert the head of bulb

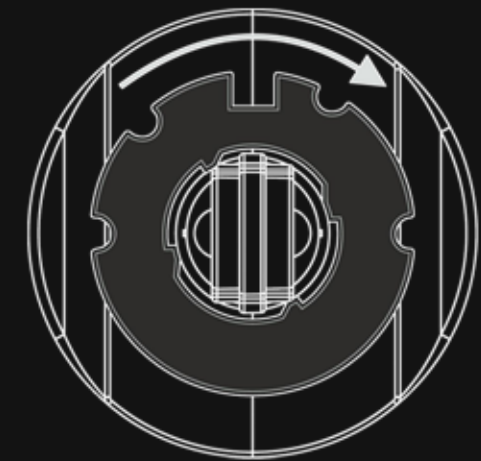

Turn the bulb adapter clockwise to lock into position

STEP 4



Plug the LED bulb to power socket.

